


# Fitting instruction Crash Balls for Axle Protection part.-no.: 555K144..

## Important mounting instruction:


Check the Crash Balls for proper fit a few days after first installation, then periodically every 3 month. Tighten them again if necessary. The tightening torque is 10Nm / 7.3lbf ft.

## Fitting front, left side

**Mount this parts and tighten them, then insert them into the axle!**

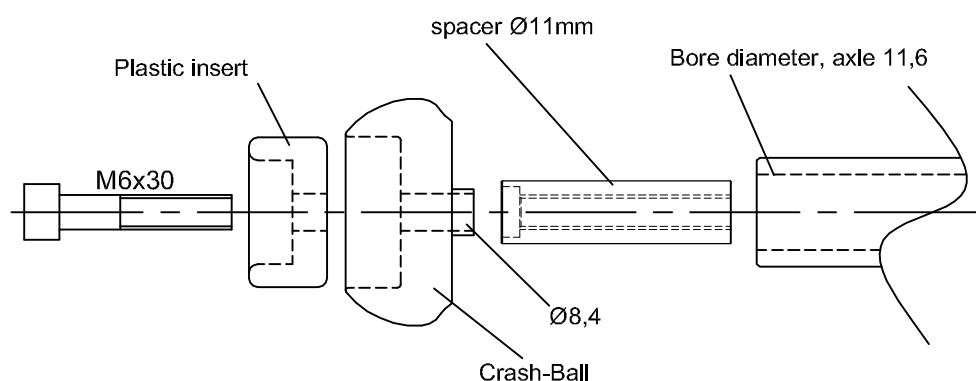

## Fitting front, right side

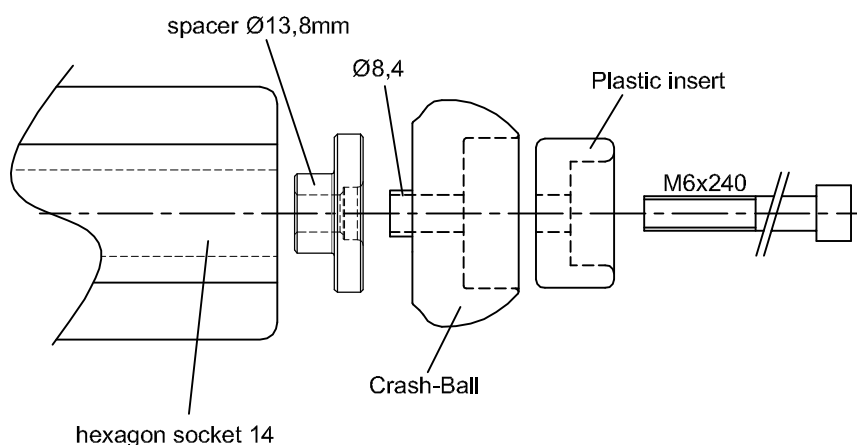

LSL-Motorradtechnik GmbH • D-47809 Krefeld

[www.lsl.eu](http://www.lsl.eu)

Rev.00 04.06.14