

Instructions of use



Assembly instructions tank pad

We would like to congratulate you on purchasing this tank pad. This product protects your tank from scratches and other damages to the paintwork by means of e.g. jacket buttons, zippers and belt buckles.

Please note the following information and tips for professional assembly:

Never stick the tank pad to paintwork which has not yet cured! Fresh lacquers evaporate so called dissolvent "plasticisers" for approx. 4-6 months. If the paintwork has not yet cured completely, the tank pad adhesive and the paintwork surface can be permanently damaged.

Montage:






Select the area of the tank to be covered in order to protect it from contact with your clothing, especially zippers, belt buckles and buttons, in the best possible way while driving.

Pre-cleanse the area to be bonded with a clean cloth and subsequently degrease with the enclosed cleaning cloth. In the case of repainted tanks, try the degreaser in a less visible area at first. Aerosol lacquers are not always resistant like professional paintjobs. Do not use any paint thinner!

Remove the protective film from the rear side of the tank pad and stick the pad onto the tank in a carefully aligned way. For larger pads, only partly remove the film at first, place the pad onto the tank and then remove the residual film during the bonding process. With pads consisting of individual segments, pay attention to symmetry and constant spaces between the segments. Firmly press on the pad with a soft, lint-free cloth.

In order to remove the pad, slightly heat it up with a common hairdryer. Attention: do not heat the fuel-filled tank, explosion danger!

We recommend to remove the emptied tank and to place it on a workbench. Remove inflammable items from the surroundings. Open the tank cap. Keep your face away from the opening (danger of poisoning due to fuel fumes). Wipe away adhesive residues with a sticker remover or e.g. with WD-40-Multipurpose-Spray. Test the lacquer compatibility of the sticker remover in a less visible area at first.

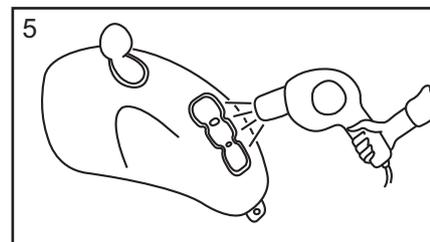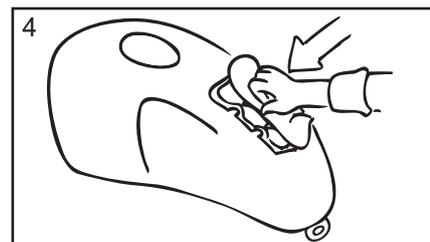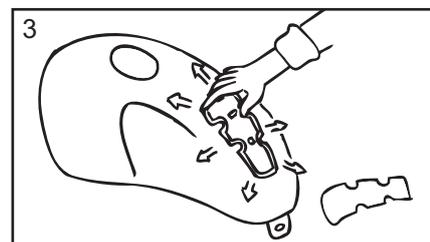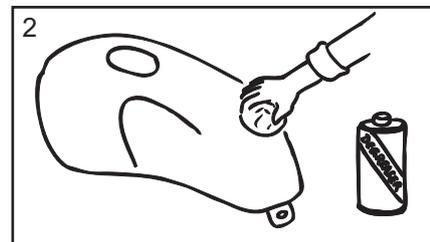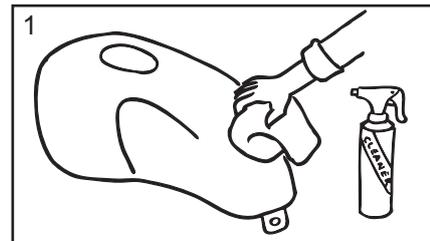

Please contact our technics centre at the fax number 0049(0)40-734 193-58 resp. by email: technikcenter@louis.de before using the article for the first time, if you have any questions on the product and/or these instructions. We will be happy to provide you with quick help. In this way, together we guarantee that the product is correctly assembled and used without any problems!